

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.  
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH

Im Gewerbegebiet 1

DE-73116 Wäschenbeuren

+49 (0) 7172-92666-0

[info@process-informatik.de](mailto:info@process-informatik.de)

<https://www.process-informatik.de>

**Menutree Website:**


- + Products / docu / downloads
- + Hardware
- + Remote maintenance
- + S7
- + Internet
- + TeleRouter

**QR-Code Website:**




Please make sure to update your drivers before using our products.

## SMS Email with LOGO!

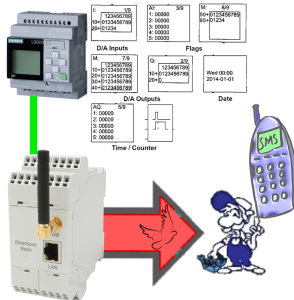


Send of all kinds of SMS-messages controlled by the LOGO!-Control

## Router - Mode (access to the network without router)

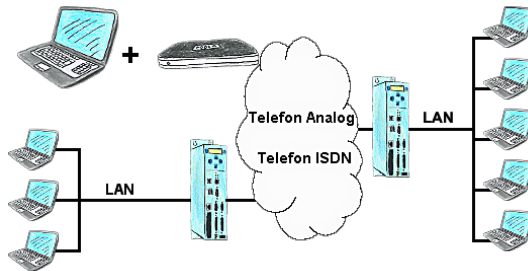


The Tele-Prof-II can also be used as a router for access from a PC via dial-up connection, so that a communication with the behind covered network results. Furthermore a network connection can be made with the TP-II TP-II-line, but in doing so the IP-address-root must differ.

Logging and analysis of communication data
--

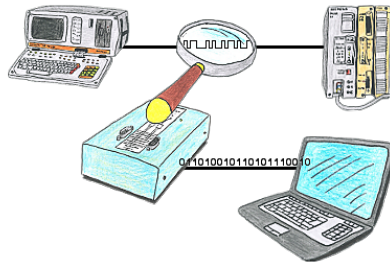

You want check, why your application cant communicate with the PLC or why after some time past the communication will be broken? No problem, integrate the PG-FOX-hardware in this communication way and log through the PG-FOX-software on an PC the sendend data in the exact time. So, you can later check the date and find a solution of the problem.

Standalone recording
----------------------

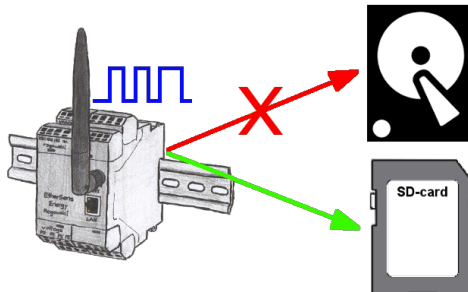

With the integrated SD-card-slot you back-up the recorded data in the device and dont need an external memory. Nevertheless you can send additional the data via FTP to a FTP-server.

## S5-PLC over LAN




Communication with S5-PLC via Ethernet, just how and with what?

Data-communication with S5-PLC from PC or other devices via network, which interface is required. Questions you don't have to worry about. With "S5 over LAN" you get the right interface-products for your interface of the PLC.

Which one you use then is up to you.

## Remote Maintenance via keyboard and voice

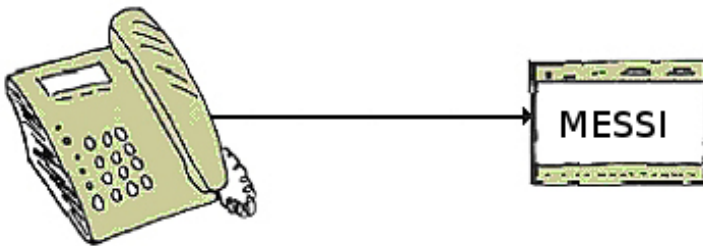

The MESSI remote-station will be called directly by integrated mobile-phone. If a connection comes off, digital In- and Outputs for teleswitching will be transmitted. Each device can both transmit state of things and accordingly receive switch signals.