Under the web-address https://www.process-informatik.de are product specific
documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.

Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0

info@process-informatik.de
https://www.process-informatik.de

Menutree Website:

QR-Code Website:

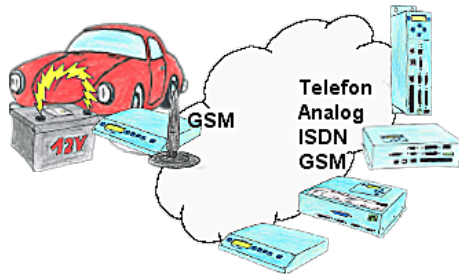+ Products / docu / downloads
 + Micro-SD-card 32GB

Please make sure to update your drivers before using our products.

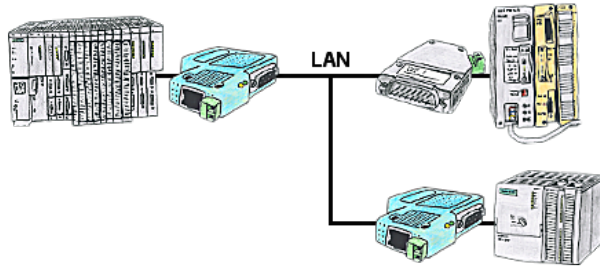| Use in the car with a 12V supply only |
|:---:|

Your're on road with your car and your employee reports a failure? What next? Approach the next parking place and try to get a telephone line to solve the problem? Or solve the problem in your head? Hit the next parking place and start your Tele-Book which is plugged on your car's cigarette lighter, and build-up a connection to your installation. With the notebook you will solve the problem within a short time.

| Data backup S7-PLC PN-port on USB-stick |
|:---:|

S7-PLC triggered DB-backup/-restore without additional PC via PN-port to USB-stick
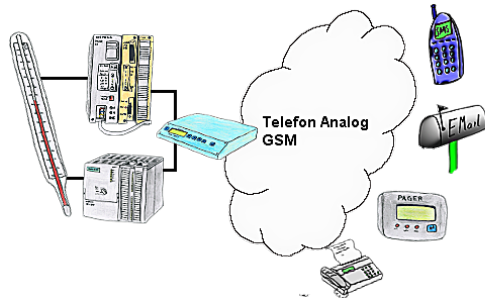
Your pumping stations report the water levels of the central control via telephone network. The central office itself can of course transmit commands/messages to the substations as well. Thereto no dedicated line is required, it's sufficient when the stations connect via network (DSL-router).
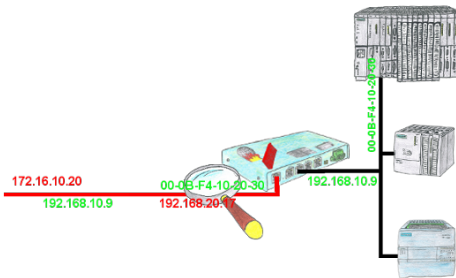
S7-300/400 (MPI/DP) to S5

Coupling S7-controller with MPI/Profibus at S5-control with PD-port via network

Failure report transmission released by the PLC

Your outstation reports the current value cyclically, or in case of malfunction the status via FAX, to your mobile phone as SMS or to your pager.

Permit requests depending on the ip- and mac-address

You have in your facility machines from different manufacturers and no one does get access to the controls of the other? No problem, with the S7-firewall you can filter who can ever communicate with the control network and which user with which end users. This is done through the IP address and MAC address.