

Under the web-address <https://www.process-informatik.de> are product specific documentations or software-driver/-tools available to download.
If you have questions or suggestions about the product, please don't hesitate to contact us.


Process-Informatik Entwicklungsgesellschaft mbH
Im Gewerbegebiet 1
DE-73116 Wäschenbeuren
+49 (0) 7172-92666-0
info@process-informatik.de
<https://www.process-informatik.de>

Menutree Website:

- + Products / docu / downloads
- + Software
 - + Programming-software PG-2000 Step5 & Step7
 - + Complete package




QR-Code Website:




Please make sure to update your drivers before using our products.

Direct-mode "extended serial interface"

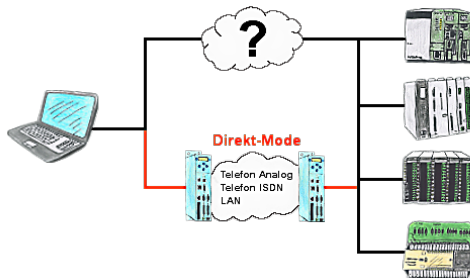


There is an unsupported control or data logger or converter integrated in your installation which protocol is not supported? No problem, the signs that the PC in the office sends will be transferred via telephone line by the Direct-mode, and on-site reproduced by the TP-II. The way back is identical. So in that case there's also a communication to the electronic devices available.

Transformation of Rack/Slot in TSAP to MPI-address

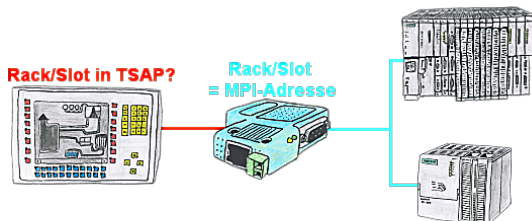

Your panel or visualisationsystem addresses the used PLC with Rack/Slot in TSAP? No problem, activate this mode in the S7-LAN and you will get actual data from the PLC.

Data backup S7-PLC over MPI/Profibus on USB-stick via dig. IO




Via digital input triggered DB-backup/-restore without additional PC via MPI/Profibus to USB-stick

Remote-maintenance Pilz-PLC with firewall



Remote-maintenance of a Pilz-controller with network-connection via secure VPN-tunnel and scalable firewall

BOSCH-CL <=> S7-TCPIP




Bring your BOSCH-CL control CL200 - CL400 into the network

Link the PLC with your production-data-acquisition or other Industry 4.0-applications

Communicate with the controller as if you were talking to an S7-PLC, but the data comes from the CL-PLC

Networking CL-controllers without much effort (set the IP-address to match your subnet in the module, nothing more)

User dependant network access

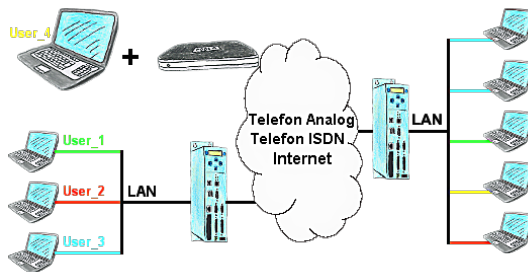

You have PLC/LAN-participants different supplier in your network and everybody should have access to this network? No problem, you give every supplier a VPN-username and password, define in the destination device a user-dependent network-access and after positiv login he only can communicate to the released ip-addresses.